

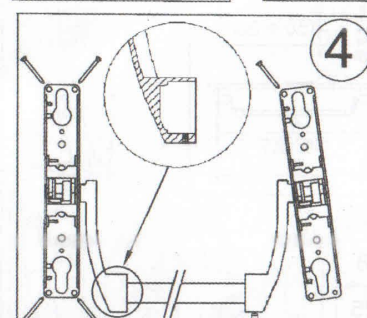

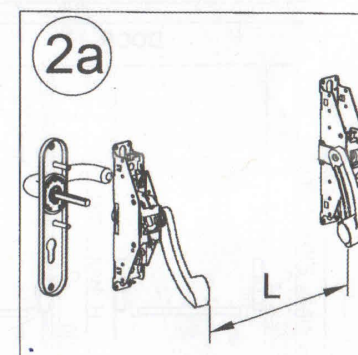
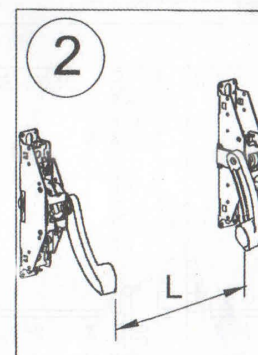
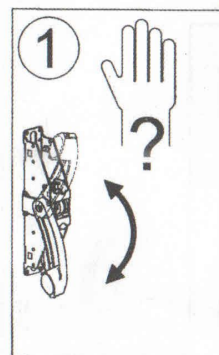
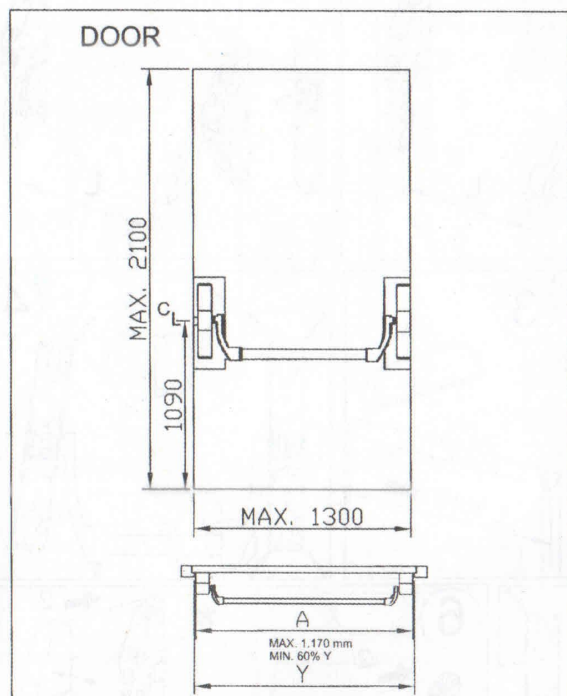



SERIE UNIVERSAL


ART NO.1700A

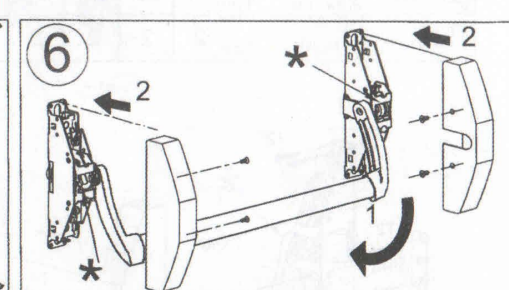


	970	2035T 4039T	CF60
	T1 M4 X 9.5	6	6
	T2 Ø 4.2 x 16	8	8
	T3 M4 X 4.5	2	2

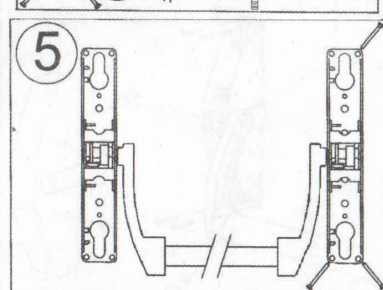

ART NO.1700B 1700C 1700D

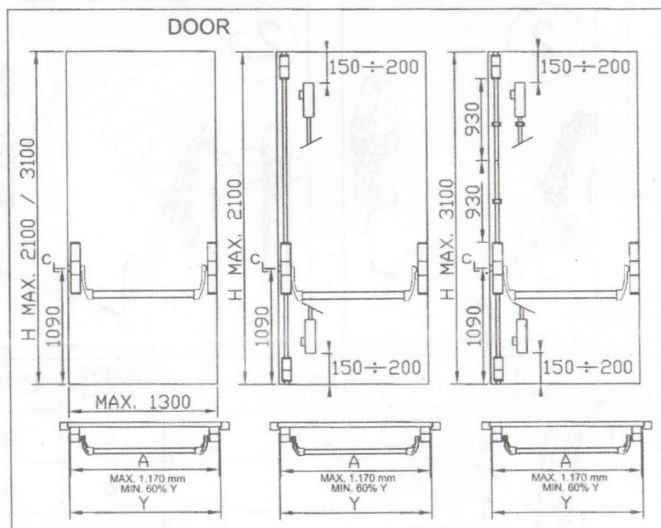

		910	920	930	950	950L
	M4 X 9.5 T1	4	10	8	8	8
	Ø 4.2 x 16 T2	11	23	21	24	25
	M4 X 4.5 T3	2	2	2	2	2

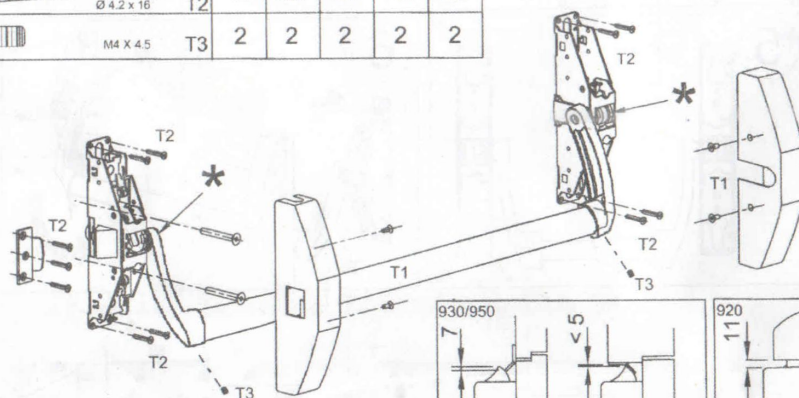

1700C

1700D

930/950

7











< 5


11

8

8

8

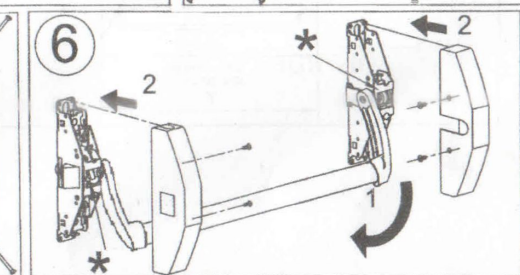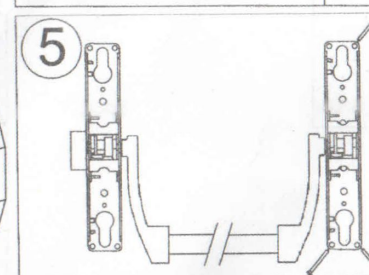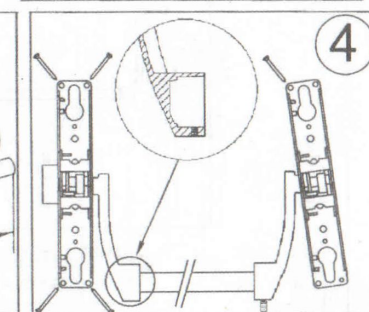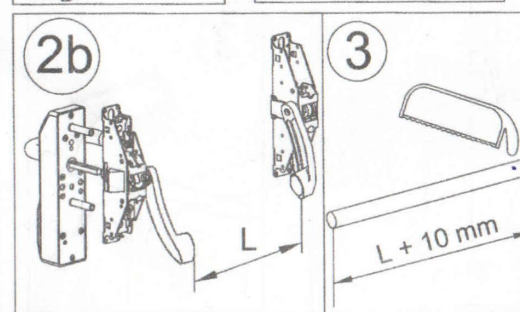

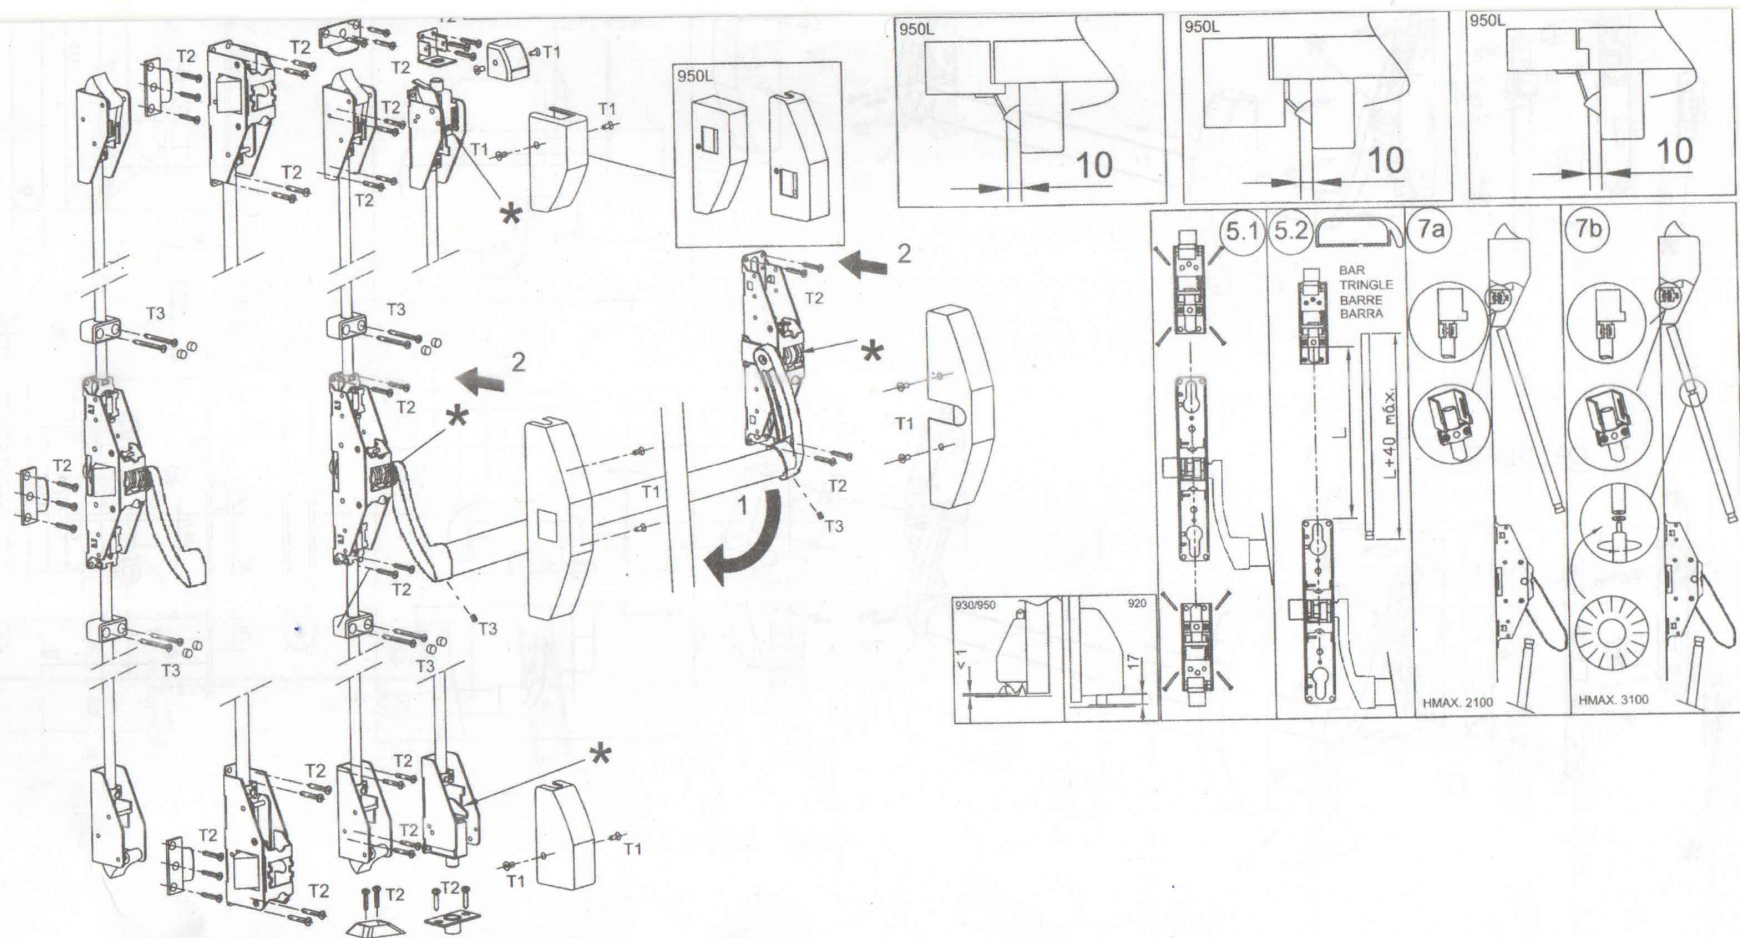

* IMPORTANT: in order to guaranty a correct use, it is compulsory to lubricate the driving parts (upper latch, lower latch, central latch, etc.) while assembling, and afterwards every 20.000 cycles and at least once per year.