




Positioning and application fields of the adjustable hinge Eclipse 3.2 HD, Eclipse 3.4 HD, Eclipse 2.1, Eclipse 2.2 for flush doors

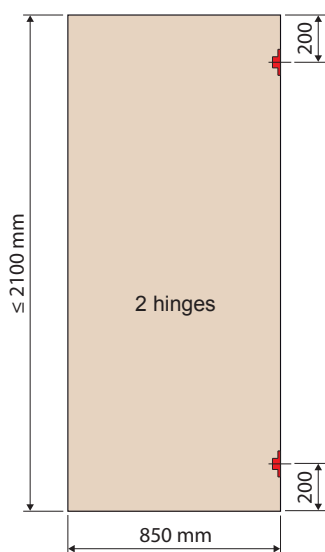


Note. Two hinges capacity is 60 kg. In any case if the door is higher than 1600 mm we suggest you a third hinge in the central position to reduce deformations.

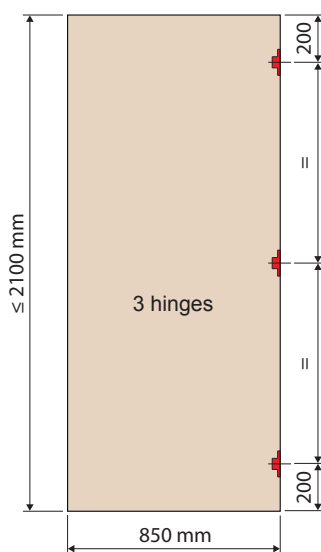


Note. Three hinges capacity is 80 kg.

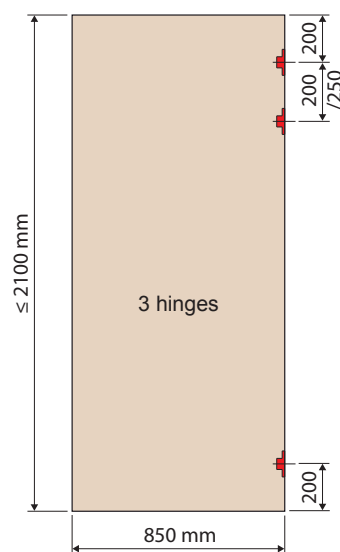

Note. Three hinges capacity is 80 kg. The third hinge paired at the top is recommended when using an overhead door closer (A) or if installed in high-traffic locations.

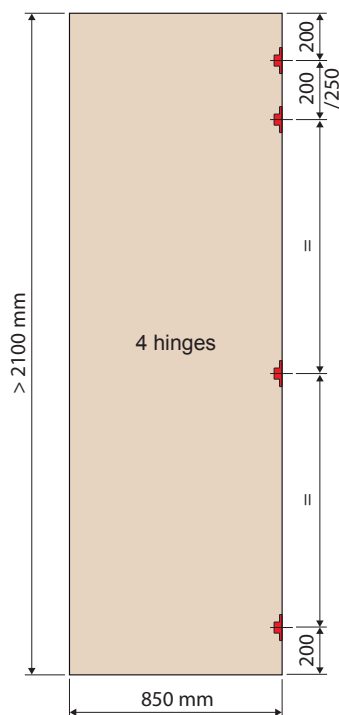

Note. The fourth hinge is recommended when using an overhead door closer (A) and door seals (B).

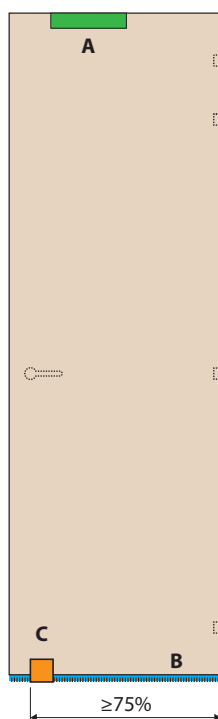

THIRD-PARTY ACCESSORIES

Overhead door closer (A)

Door seals (B)

Floor-mounted door stop (C)
Install it at a distance from the hinges of at least 75 % of the sash width in the direction of the lock.

Positioning and application fields of the adjustable hinge Eclipse 3.2 HD, Eclipse 3.4 HD, Eclipse 2.1, Eclipse 2.2 for flush doors

Sash weight = 25 kg/m²

Thickness of the glass: 10 mm (total)

SRH (height) (mm)	DIMENSIONS															
	SRW (width)															
	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600																
700																
800																
900	2	2	2	2	2	2	2	2	3	3	3	3				
1000	2	2	2	2	2	2	2	2	2	3	3	3	3			
1100	2	2	2	2	2	2	2	2	2	3	3	3	3	3		
1200	2	2	2	2	2	2	2	2	2	3	3	3	3	3		
1300	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	
1400	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	
1500	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	
1600	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3
1700	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3
1800	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3
1900	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
2000	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
2100	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
2200	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
2300	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3
2400	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3
2500	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3
2600	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3
2700	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	4
2800	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	4

Sash weight = 30 kg/m²

Thickness of the glass: 12 mm (total)

SRH (height) (mm)	DIMENSIONS															
	SRW (width)															
	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600																
700																
800																
900	2	2	2	2	2	2	2	3	3	3						
1000	2	2	2	2	2	2	2	2	3	3	3					
1100	2	2	2	2	2	2	2	2	3	3	3	3				
1200	2	2	2	2	2	2	2	2	3	3	3	3				
1300	2	2	2	2	2	2	2	2	2	3	3	3	3			
1400	2	2	2	2	2	2	2	2	2	3	3	3	3			
1500	2	2	2	2	2	2	2	2	2	3	3	3	3			
1600	2	2	2	2	2	2	2	2	2	3	3	3	3			
1700	2	2	2	2	2	2	2	2	2	2	3	3	3	3	4	4
1800	2	2	2	2	2	2	2	2	2	2	3	3	3	3	4	4
1900	2	2	2	2	2	2	2	2	2	2	3	3	3	3	4	4
2000	2	2	2	2	2	2	2	2	2	3	3	3	3	3	4	4
2100	2	2	2	2	2	2	2	2	2	3	3	3	3	3	4	4
2200	2	2	2	2	2	2	2	2	3	3	3	3	3	3	4	4
2300	2	2	2	2	2	2	2	3	3	3	3	3	3	3	4	4
2400	2	2	2	2	2	2	3	3	3	3	3	3	3	3	4	4
2500	2	2	2	2	2	2	3	3	3	3	3	3	3	4	4	4
2600	2	2	2	2	2	3	3	3	3	3	3	3	4	4	4	4
2700	2	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4
2800	2	2	2	2	3	3	3	3	3	3	3	4	4	4	4	4

Positioning and application fields of the adjustable hinge Eclipse 3.2 HD, Eclipse 3.4 HD, Eclipse 2.1, Eclipse 2.2 for flush doors

Sash weight = 35 kg/m²

Thickness of the glass: 14 mm (total)

SRH (height) (mm)	DIMENSIONS															
	SRW (width)															
	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600																
700																
800																
900	2	2	2	2	2	2	3	3	3							
1000	2	2	2	2	2	2	3	3	3	3						
1100	2	2	2	2	2	2	2	3	3	3						
1200	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4	
1300	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4	
1400	2	2	2	2	2	2	2	2	3	3	3	4	4	4	4	4
1500	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4
1600	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4
1700	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4
1800	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4
1900	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4
2000	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4
2100	2	2	2	2	2	2	2	2	3	3	3	3	3	4	4	4
2200	2	2	2	2	2	2	3	3	3	3	3	3	3	4	4	4
2300	2	2	2	2	2	3	3	3	3	3	3	3	4	4	4	4
2400	2	2	2	2	3	3	3	3	3	3	3	4	4	4	4	4
2500	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4
2600	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4	5
2700	2	2	2	3	3	3	3	3	3	4	4	4	4	4	5	5
2800	2	2	2	3	3	3	3	3	4	4	4	4	4	4	5	5

Sash weight = 40 kg/m²

Thickness of the glass: 16 mm (total)

SRH (height) (mm)	DIMENSIONS															
	SRW (width)															
	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600																
700																
800																
900	2	2	2	2	2	3	3	3								
1000	2	2	2	2	2	2	3	3	3							
1100	2	2	2	2	2	2	3	3	3							
1200	2	2	2	2	2	2	3	3	3							
1300	2	2	2	2	2	2	3	3	3	3	4	4	4	4		
1400	2	2	2	2	2	2	2	3	3	3	4	4	4	4		
1500	2	2	2	2	2	2	2	3	3	3	4	4	4	4	4	
1600	2	2	2	2	2	2	2	3	3	3	4	4	4	4	4	
1700	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4	
1800	2	2	2	2	2	2	3	3	3	3	3	4	4	4	4	4
1900	2	2	2	2	2	2	3	3	3	3	3	4	4	4	4	4
2000	2	2	2	2	2	2	3	3	3	3	3	4	4	4	4	4
2100	2	2	2	2	2	2	3	3	3	3	3	4	4	4	4	4
2200	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4
2300	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4	5
2400	2	2	2	3	3	3	3	3	4	4	4	4	4	4	5	5
2500	2	2	2	3	3	3	3	3	4	4	4	4	4	5	5	5
2600	2	2	2	3	3	3	3	4	4	4	4	4	5	5	5	5
2700	2	2	3	3	3	3	4	4	4	4	4	5	5	5	5	5
2800	2	2	3	3	3	3	4	4	4	4	4	5	5	5	5	5

Positioning and application fields of the adjustable hinge Eclipse 3.2 HD, Eclipse 3.4 HD, Eclipse 2.1, Eclipse 2.2 for flush doors

Sash weight = 45 kg/m²

Thickness of the glass: 18 mm (total)

SRH (height) (mm)	DIMENSIONS															
	SRW (width)															
	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600																
700																
800																
900	2	2	2	2	3	3	3									
1000	2	2	2	2	2	3	3	3								
1100	2	2	2	2	2	3	3	3								
1200	2	2	2	2	2	3	3	3	4	4	4	4				
1300	2	2	2	2	2	2	3	3	3	4	4	4				
1400	2	2	2	2	2	2	3	3	3	4	4	4	4			
1500	2	2	2	2	2	2	3	3	3	4	4	4	4			
1600	2	2	2	2	2	2	3	3	3	4	4	4	4	4		
1700	2	2	2	2	2	2	3	3	3	3	4	4	4	4	4	
1800	2	2	2	2	2	3	3	3	3	3	4	4	4	4	4	
1900	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4	
2000	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4	5
2100	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4	5
2200	2	2	2	3	3	3	3	3	4	4	4	4	4	5	5	5
2300	2	2	2	3	3	3	3	4	4	4	4	4	5	5	5	5
2400	2	2	3	3	3	3	4	4	4	4	4	5	5	5	5	5
2500	2	2	3	3	3	3	4	4	4	4	4	5	5	5	5	
2600	2	2	3	3	3	4	4	4	4	4	5	5	5	5	5	
2700	2	2	3	3	3	4	4	4	4	5	5	5	5	5		
2800	2	2	3	3	4	4	4	4	4	5	5	5	5			

Sash weight = 50 kg/m²

Thickness of the glass: 20 mm (total)

SRH (height) (mm)	DIMENSIONS															
	SRW (width)															
	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600																
700																
800																
900	2	2	2	3	3	3										
1000	2	2	2	2	3	3	3									
1100	2	2	2	2	3	3	3									
1200	2	2	2	2	2	3	3	3	4	4	4					
1300	2	2	2	2	2	3	3	3	4	4	4					
1400	2	2	2	2	2	3	3	3	4	4	4	4				
1500	2	2	2	2	2	3	3	3	4	4	4	4				
1600	2	2	2	2	2	3	3	3	4	4	4	4				
1700	2	2	2	2	3	3	3	3	3	4	4	4	4	4	5	
1800	2	2	2	3	3	3	3	3	3	4	4	4	4	5		
1900	2	2	2	3	3	3	3	3	3	4	4	4	4	5		
2000	2	2	2	3	3	3	3	3	4	4	4	4	4	5	5	
2100	2	2	2	3	3	3	3	4	4	4	4	4	5	5	5	
2200	2	2	3	3	3	3	4	4	4	4	4	5	5	5	5	
2300	2	2	3	3	3	3	4	4	4	4	5	5	5	5	5	
2400	2	2	3	3	3	4	4	4	4	5	5	5	5	5		
2500	2	2	3	3	4	4	4	4	4	5	5	5	5			
2600	2	2	3	3	4	4	4	4	5	5	5	5				
2700	2	3	3	4	4	4	4	5	5	5	5					
2800	2	3	3	4	4	4	4	5	5	5	5					